

CERAMIN[®] SPC

Made in Germany

Something more than SPC

Authentic floors made with respect for nature. Our unique technology enables us to produce a PVC-free, 100% recyclable product with the best designs as well as excellent quality and finish.




Protection against water

A rigid core composite flooring, also known as SPC flooring, is the most durable waterproof vinyl flooring on the market. The 100% waterproof core is a reliable and proven protection against the effects of water spills.

High abrasion class

The entire collection is non-slip, includes an AC5 or AC6 surface layer for heavy traffic and has the best result in terms of dimensional stability. In addition, Ceramin boards are really light, yet still very durable.



Different dimensions

We offer beautiful wood and stone patterns and many sizes of our planks and tiles. Colours and textures are the best inspiration for new and interesting designs.

Natural look

Thanks to our unique digital printing technology, we are able to create decors that perfectly reflect natural wood.



SPC
STABILITY

100%
WATERPROOF

WARM
TOUCH

VOC
U

PVC
FREE

SMART
RENOVATION



Why Ceramin?



Fast and efficient locking system + easy cutting

Simply click the long side of the next row's plank into the previous row. It's child's play. Need to cut the plank? Use a cutter knife!

Scan!




See how easy it is to lay a Ceramin floor.



A durable and sustainable concept with an ecological polymer

We constantly strive to achieve a closed product life cycle, including its production, use and then its disposal in the recycling process. We are able to recycle Ceramin and give it a second life in our own products or in garden furniture, car bumpers or packaging. Thanks to the use of green electricity at our site in Kaisersesch and participation in CO₂ projects, we have already become completely neutral in terms of carbon dioxide emission.


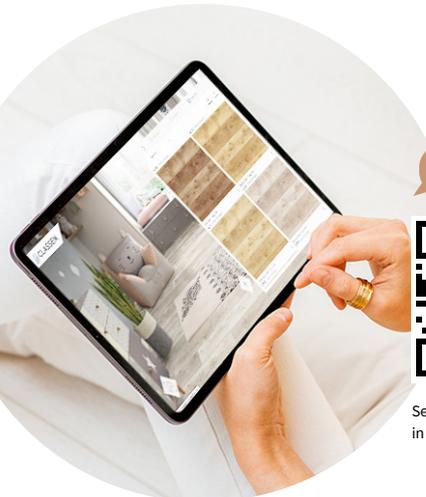


Scan!




See how the decors look in interiors.

Collection

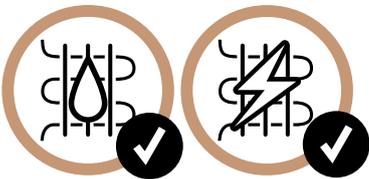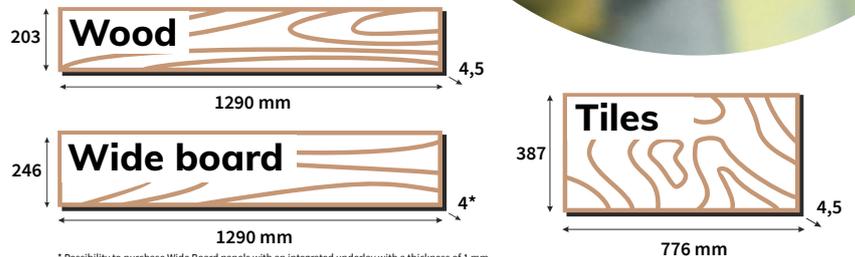

Underfloor heating

Our panels are ideal for covering a floor with water or electric heating with a maximum heating temperature of up to 29°C. Thermal resistance of panels with a thickness of 4.5 mm = 0.02 m² K/W.

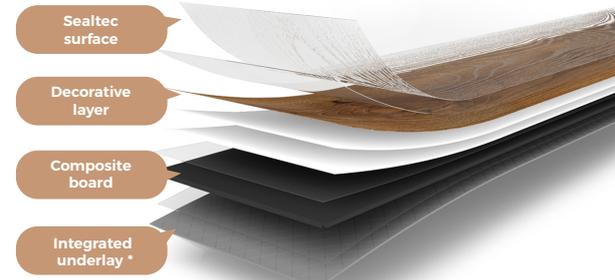

- High stability & strenght
- Acoustic comfort
- 100% waterproof
- Warm when touched
- Eco-friendly & PVC-free
- Light & easy to handle
- Thin, ideal for renovation
- Easy cutting
- Quick locking
- Reduced installation time

